CASE STUDY / IP CCTV MAINTENANCE


Clear visibility. Dependable support.

Cohance Lifesciences Limited

Ankleshwar | API Unit-III
Preventive care, breakdown response and verified surveillance-service restoration.

01 April 2025 - 31 March 2027

Two annual orders | Documented AMC engagement
Detailed service method and complaint-to-closure workflow

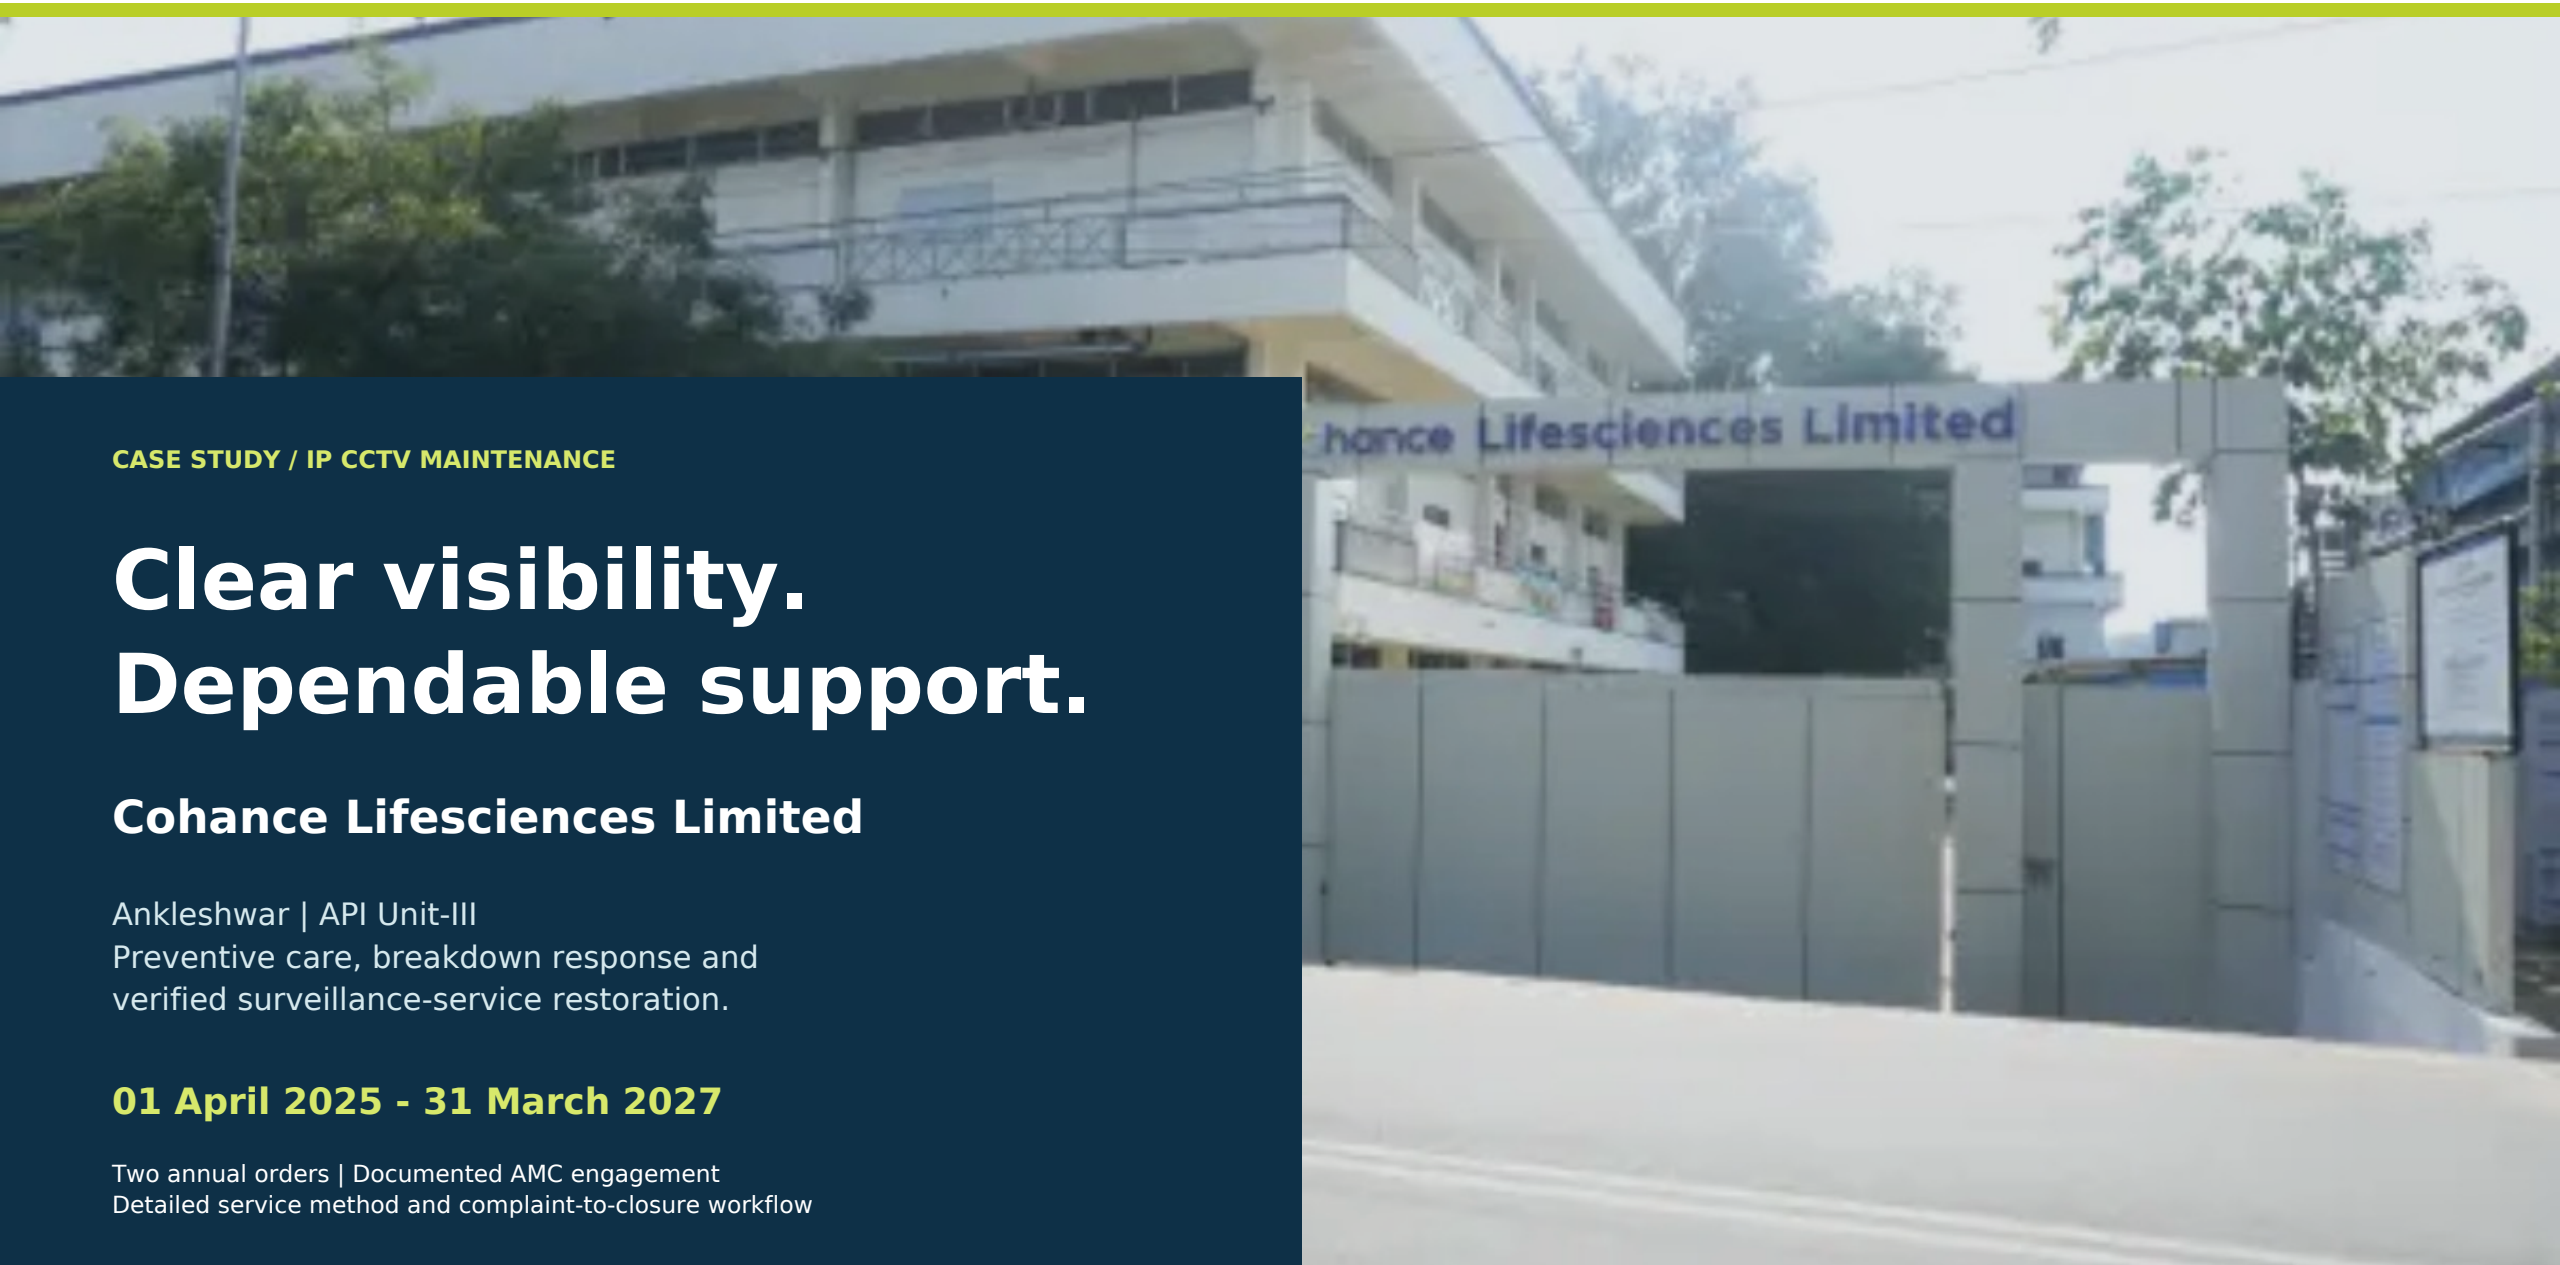

The engagement | CCTV care across two AMC periods

Cohance’s Ankleshwar facility commissioned D-TECH to maintain its IP CCTV system, followed by a renewal for the next annual period. The service requirement is to keep camera visibility, recording availability and incident support under a clear maintenance process, while following the customer’s site safety controls.

2025-26

01 APR 2025 - 31 MAR 2026

WO 5400001029 | 14 April 2025

2026-27


01 APR 2026 - 31 MAR 2027

WO 5200032023 | 24 March 2026

Contract point	What the documents establish
2025-26 SERVICE COMMITMENTS	4 preventive maintenance visits; unlimited breakdown maintenance calls; service reports to accompany supporting documents.
2026-27 RENEWAL	CCTV Camera AMC Renewal for 1 April 2026 to 31 March 2027. Visit frequency / breakdown terms are not repeated and require renewal-scope confirmation.
SITE & INVENTORY	Plot 3102/B, GIDC, Ankleshwar (E), Bharuch 393002; renewal identifies API Unit-III. Camera brands, quantities and recorder inventory are not supplied.
SERVICE QUANTITY	Both orders show 4 NOS service quantity. This does not establish four cameras; the 2025-26 order separately specifies four preventive visits.

Reading guide: 03 Support architecture | 04 Micro-level maintenance | 05 Complaint process | 06 Preventive visits, governance and support

Support architecture | Verify the whole surveillance path

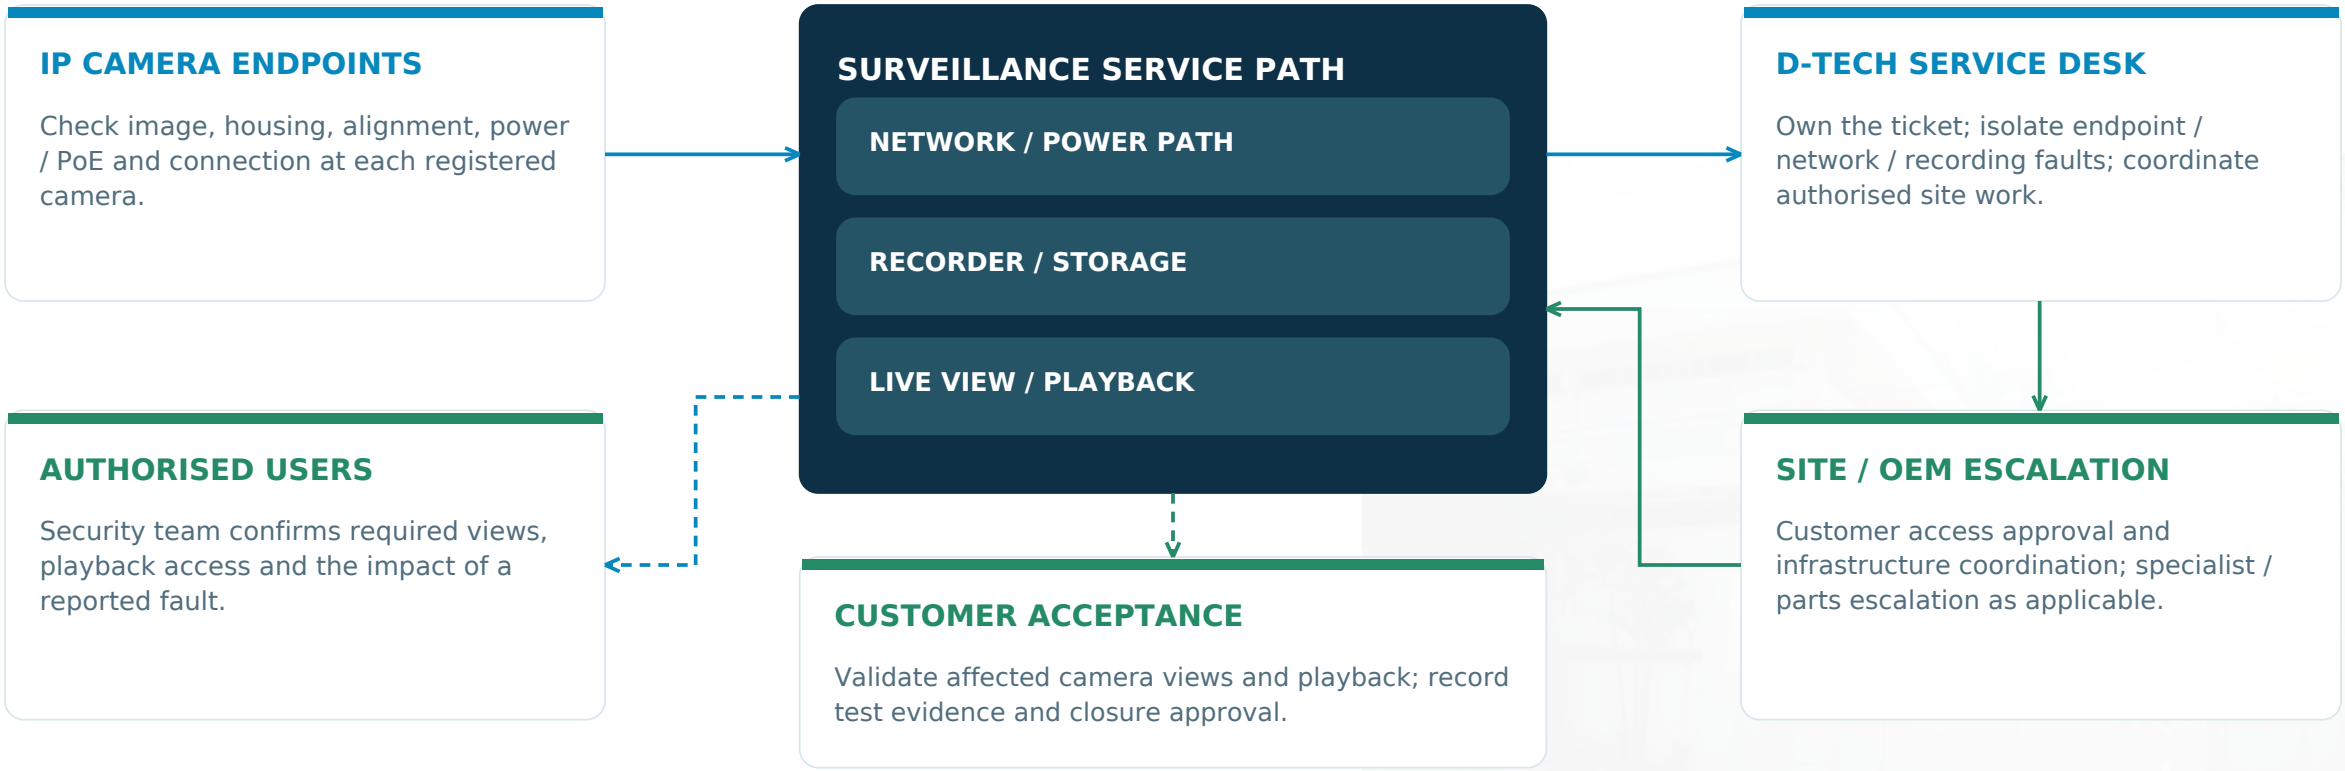

Logical support model only: camera count, NVR / VMS type, VLANs, retention period, switches, power sources and storage capacity require an asset survey.

Micro-level maintenance | Check, isolate and verify

Support area	Detailed diagnostic / maintenance tasks	Evidence and control
CAMERA IMAGE	Inspect accessible lens / housing, focus, scene alignment and live image; check day / night behaviour where applicable.	Camera ID and before / after view; approved cleaning and access procedure.
POWER / CABLING	Check power / PoE presence, connector condition, link state and accessible patch leads; isolate the affected segment.	Port / camera mapping; coordinate electrical or switch changes with the owner.
NETWORK PATH	Verify approved addressing, reachability and device connection state; distinguish camera failure from network interruption.	Fault location and test evidence; no unauthorised IP / VLAN / firewall changes.
RECORDING / STORAGE	Check recorder health, channel recording state, disk / volume alerts and gaps at representative incident times.	Recording / playback evidence; avoid formatting drives or deleting footage.
TIME / RETENTION	Check time alignment and configured recording schedules; verify observed earliest available footage against the agreed target.	Time offset, schedule and observed retention. Do not invent storage capacity or retention.
ACCESS / EXPORT	Confirm authorised live view and playback; perform a permitted export test using non-sensitive footage where practical.	User-role approval and export result; restricted footage and credentials stay protected.
REPAIR / RESTORE	Resolve approved settings / connection faults; coordinate covered repairs or separately approved parts; retest affected channels.	Action / parts log, test result and customer acceptance. Replacement coverage requires agreement.

Maintenance tasks describe the operating method; actual incident results, camera inventory and measured availability were not supplied.

Complaint-to-closure | Accountable service at every step

01 | REGISTER

Log camera / area, fault time, live-view or recording symptom and business impact.

02 | ASSESS

Isolate endpoint, power, network or recorder issue; agree priority and safe access needs.

03 | PLAN & AUTHORISE

Confirm site induction, access permit, maintenance window and any parts / change approval.

04 | RESTORE

Execute authorised maintenance / repair; coordinate customer or OEM dependencies and updates.

05 | VALIDATE

Confirm image, recording and playback for affected channels; security owner verifies requirements.

06 | CLOSE & REVIEW

Record cause if known, action, parts, timestamps, evidence and customer confirmation.

Raise a service request | support.dtechindia.com | +91 99989 03042

Preventive care | Documented visits and service governance

Control	Service plan and required evidence
FOUR PREVENTIVE VISITS	2025-26 order specifies four visits. Proposed scheduling: distribute across the year with customer agreement; confirm dates, access and checklist before each visit.
UNLIMITED BREAKDOWN CALLS	Explicit 2025-26 commitment. Log every complaint and visit / action. This does not establish 24×7 support, a guaranteed repair time or free replacement parts.
SERVICE REPORTS	Maintain camera / recorder register, health findings, recording / playback checks, fault actions, pending items and customer sign-off; link reports to the order and ticket.
SITE SAFETY & CHANGE	Follow Cohance safety induction, contractor procedures and approved drawings where applicable. Obtain approvals before access at height, electrical work or disruptive changes.
RENEWAL & SERVICE REVIEW	Confirm 2026-27 visit / breakdown terms and parts scope. Review repeat faults, camera availability and observed recording gaps using actual records.

CUSTOMER / LOCATION

Cohance Lifesciences Limited | API Unit-III
Plot 3102/B, GIDC, Ankleshwar (E),
Bharuch, Gujarat 393002.

D-TECH | CUSTOMER CARE

support.dtechindia.com | Open support portal

+91 99989 03042

Basis: WOs 5400001029 and 5200032023 and client visuals. Contracted maintenance + service method; no numerical SLA or completed-service outcomes are claimed.

Detailed inventory, camera brands, parts coverage, response targets and renewal-specific visit commitments require the approved service scope.