CLIENT CASE STUDY / NEW HEALTHCARE FACILITY

Designed for care.
Connected for operation.

Neo Smiles Dental Care
Eva Maternity Home

Consultancy, solution design and deployment coordination for the new Bharuch facility - bringing connectivity, surveillance, communication and nurse calling into a coordinated infrastructure plan.



6

Infrastructure solution domains

39

Cameras in quoted design

8 + 8

Bed-call + toilet-call points

Design reference: D-TECH quotation S20752, 27 April 2026. Project photographs and nurse-call demonstration supplied by the client team.

CLIENT CONTEXT / PROJECT BRIEF

The requirement | One infrastructure plan for the facility

Care teams need clear communication and usable technology

The new facility combines dental care and maternity services. Its infrastructure needs include reliable connectivity for office and clinical support areas, camera coverage for approved locations, internal calls, announcements and a visible nurse-call indication. Coordinating cable routes, equipment locations and service responsibilities early helps these systems fit the building and the operating workflow.

D-TECH’s consultancy and delivery role

The engagement is presented around requirement assessment, technology selection, design coordination and deployment. Quotation S20752 names Amar Developers / Parth Barot as the commercial customer. The supplied invitation identifies Neo Smiles Dental Care and Eva Maternity Home at Prashorthan Heights, Bharuch.

Inside the case study	Page
Technology scope and quoted design quantities	3
3D-style solution concept and system relationships	4
Nurse-call process and demonstration	5
Deployment, commissioning and handover	6
Project photo gallery	7
Client value, location and engagement references	8


The design | Six coordinated technology domains

Domain	Design configuration in S20752	Client purpose
CCTV	33 indoor dome + 6 outdoor bullet cameras; 64-channel and 8-channel NVRs; surveillance storage.	Agreed-area surveillance and authorised live / recorded viewing.
Networking	3 PoE+ switches, 2 sixteen-port switches; 41 outlet sets; 5 patch panels; 2 x 15U + 1 x 9U racks.	Organised connectivity, terminations and equipment distribution.
Wi-Fi	9 Ubiquiti U6+ access points.	Wireless access with approved coverage and access policies.
PABX	1 Matrix ETERNITY PENX6SAC; 4 digital keyphones; 16 analogue phones; 2 cellular terminals.	Reception and internal extension communication.
PA	1 Ahuja two-zone mixer amplifier; 14 ceiling speakers; 1 paging microphone.	Operational announcements in agreed zones.
Nurse calling	8 bed-call units; 8 toilet pullcord units; 2 display boxes; 2 TVs; reporting software.	Identify patient-call locations and support staff response.

Quantities are quoted design quantities, not a certified installed inventory. Queue management appears in the enquiry heading but has no separately quantified package in the supplied quotation.

ILLUSTRATIVE SERVICE ZONES / NOT AN AS-BUILT FLOOR PLAN

The architecture | A 3D-style solution concept

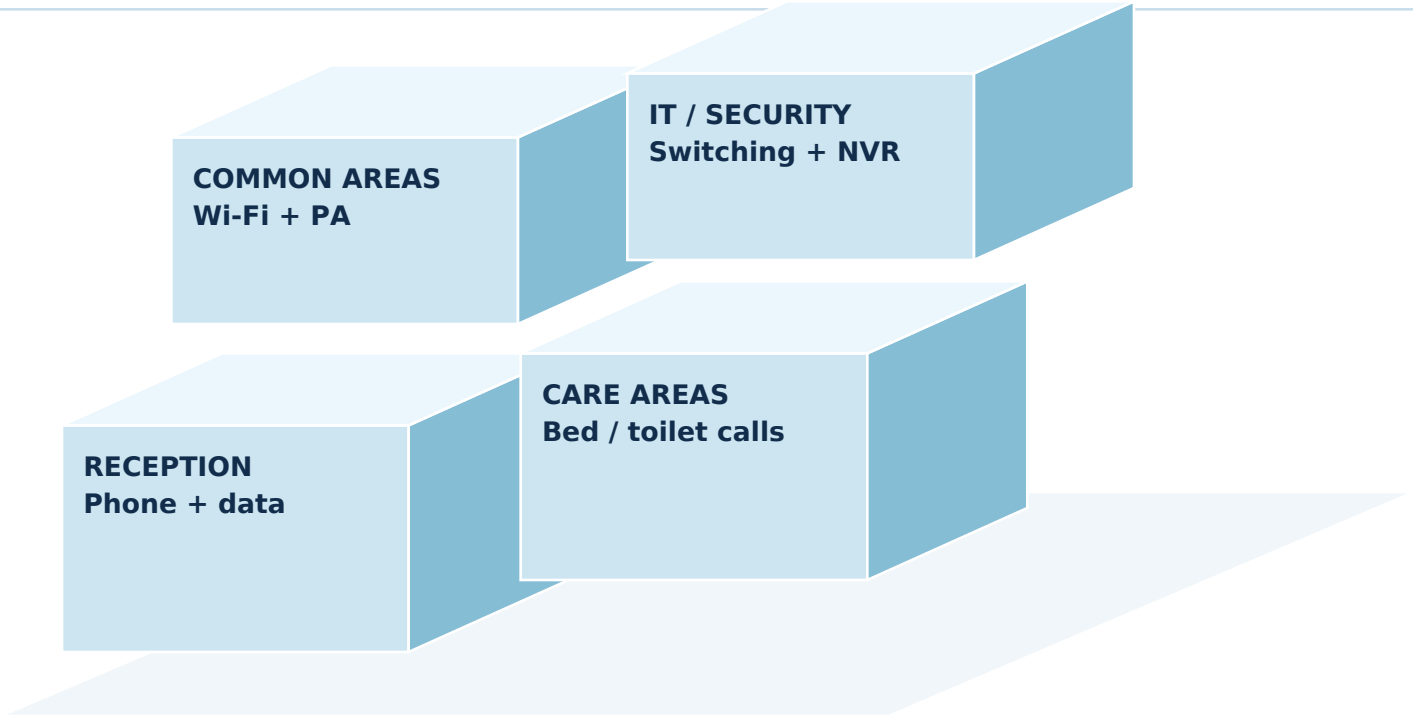

Conceptual zones

Blocks explain service relationships. Room sizes, floors, routes and equipment positions require approved site drawings.

CCTV cameras + Wi-Fi APs

↓

Network switching + NVR storage

↓

Authorised viewing / connectivity

Parallel service paths

PABX to extensions; PA amplifier to speaker zones; nurse-call inputs to staff display. Their interfaces follow the approved system design.

The workflow | A visible call from the point of care



Nurse-call display: active Bed 2 indication

The supplied video shows labelled Bed 1-8 and Toilet 1-8 locations, including an active Bed 2 indication and a later cleared display. This demonstrates display behaviour; clinical response times were not measured.

1 PATIENT CALL
Bed button or toilet pullcord

↓

2 STAFF INDICATION
Display identifies the call location


↓

3 RESPONSE & RESET
Staff attend and clear as configured

Commissioning focus

Verify every call point, its displayed label, indication, reset behaviour and reporting under the agreed configuration. Confirm staff training, escalation practice and the response to power or communication loss before operational handover.

The deployment | Consultancy through commissioning

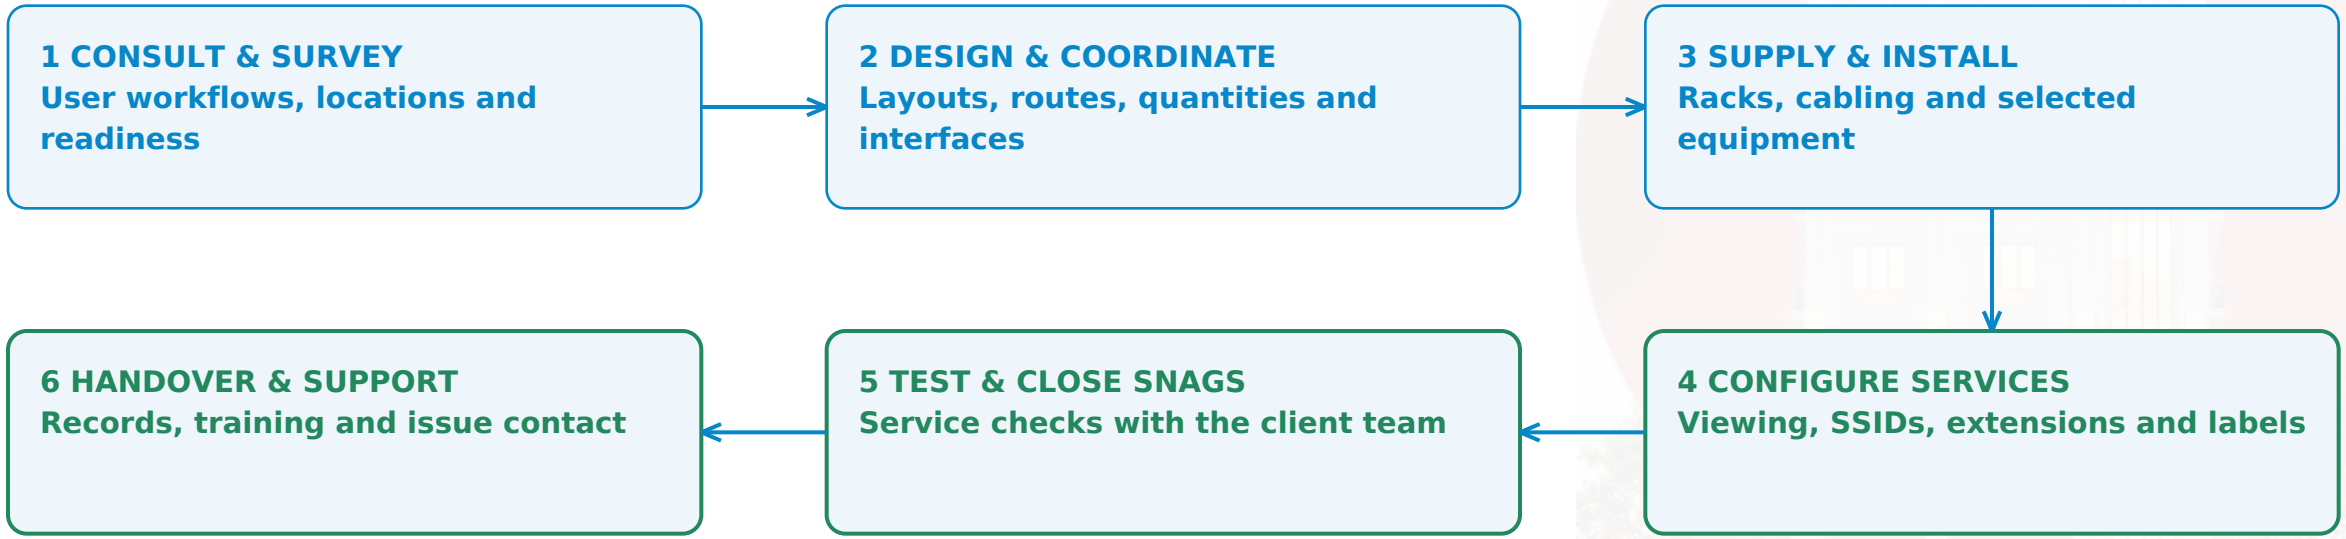

Acceptance across all six domains

Check cable links and labels, camera live view and recording playback, Wi-Fi coverage, extension calls, PA zone operation and each nurse-call input. Hand over the equipment register, approved drawings, configuration records, warranty details and support contacts. Agree surveillance retention and authorised access with the client.

This process describes the delivery and acceptance model. Final acceptance records, storage-retention settings and a completed commissioning checklist were not supplied.

The project | Installation views and service endpoints



Network rack and patching



Enclosed rack installation



Reception digital keyphone



Display endpoint

Organised infrastructure behind the care environment

The photos show the rack, patching, a digital phone and a display endpoint. The nurse-call video adds a working display demonstration to the project record.

The value | A coordinated foundation for care operations

CONNECTED OPERATIONS

Networking and Wi-Fi support the facility’s approved connectivity requirements, with organised termination and rack distribution.

COMMUNICATION AT THE POINT OF NEED

PABX, PA and nurse calling address distinct internal communication and staff-indication needs.

CLEAR SERVICE RESPONSIBILITY

One coordinated consultancy and deployment route links design decisions, site work, verification and handover.

FACILITY AND CUSTOMER

Neo Smiles Dental Care + Eva Maternity Home. Commercial reference: Amar Developers / Parth Barot, quotation S20752.

Location and engagement basis

Facility: Prashorthan Heights, C-12 & 13, Zaver Nagar, opposite Collectorate Office, Court Road, Bharuch, as shown in the supplied invitation. Quotation S20752 is dated 27 April 2026 and is an offer rather than a completion certificate. The building image and healthcare logos come from the invitation. Installation photographs and the nurse-call video were supplied for this case study. Consultancy and deployment framing follows D-TECH’s stated engagement.

Scope status: quotation-supported design with project installation views and a nurse-call demonstration. No measured uptime, clinical outcome or final project completion date is claimed.

Hilpa Patel | +91 9157420663 | AMC@DTECHINDIA.COM