Enterprise computing. Connected infrastructure.

Synchronics Electronics Private Limited

Vadodara | Office & technical operations

Dell server supply and deployment, structured networking, CCTV and access-control integration through a coordinated design, installation and handover process.

DELL POWEREDGE

R660xs | Enterprise server platform

INTEGRATED INFRA

Network | CCTV | Door access



Supplied office photograph | Documented server baseline

Project requirement | Computing, connectivity and control

The office and technical workspace needs dependable application access, organised endpoint connectivity and coordinated physical security. D-TECH’s project narrative combines server deployment with networking, CCTV and access control, so each system has a defined connection path, installation responsibility and acceptance check.

Workstream	Baseline and solution approach
Server supply	The supplied document records 1 Dell PowerEdge R660xs, dual Xeon Silver 4410T processors, 128 GB RAM, 2 x 480 GB SSDs, PERC H755, redundant power and 10 GbE / 1 GbE interfaces.
Networking	Supplied rack photograph shows structured patching, labelled panels and switching. Design uses an approved port map, addressing plan and controlled uplinks; installed switch capabilities need confirmation.
CCTV & access	Project scope stated by D-TECH. Define camera / recorder mapping, door hardware, permissions, safe exit and security-user access before configuration. Models and quantities are not in the server document.
Deployment & support	Document includes basic server deployment and 36-month ProSupport / next-business-day onsite service. Verify service-tag entitlement and activation; define separate D-TECH service responsibilities.

Reference: supplied Synchronics_PO.pdf, containing a signed server commercial document dated 29 September 2023, deal ID 13564.

03 Architecture | 04 Server commissioning | 05 CCTV & access | 06 Implementation flow | 07 Site views, handover & support.

Architecture | A structured path from users to services

UPSTREAM / SECURITY EDGE

Customer internet / gateway
Approved firewall policies
Routing, DNS and DHCP interface

NETWORK DISTRIBUTION

Approved switching / uplinks
Patch panels and labelled outlets
Segmentation where supported

DELL R660xs SERVER

Approved application / VM workloads
Production NIC connections
Separate iDRAC management access

USERS & WORK AREAS

PC / laptop -> outlet -> patch panel
User network -> approved services
Port identity at rack and endpoint

CCTV NETWORK

Cameras -> approved switch / PoE
Recorder / VMS -> authorised operator
Recording path tested independently

DOOR CONTROL

Readers / controllers -> network
Approved access administration
Lock / exit hardware at each door

Topology is illustrative, not an as-built map. A single server does not establish compute HA; CCTV storage and access software are not assumed to run on it.

Server deployment | Validate every hardware and service layer

Layer	Supply baseline	Installation / acceptance check
Compute & memory	2 x Xeon Silver 4410T, each 10 cores / 20 threads; 4 x 32 GB RDIMMs = 128 GB.	Check inventory, memory placement and health. Match workloads to capacity; validate firmware and OS / hypervisor compatibility.
Storage & RAID	2 x 480 GB SATA SSDs; PERC H755; RAID is listed as unconfigured.	Agree disk layout before deployment. RAID 1 is a design option (~480 GB nominal usable); redundancy does not replace backup.
Power & rack	Dual hot-plug redundant 1400 W supplies; server deployment service listed.	Check rack space / rails, airflow and labelled power feeds. Confirm protected supply and test PSU status under an approved procedure.
Network & management	Quad-port 10 GbE Base-T adapter; quad-port 1 GbE adapter; onboard dual-port 1 GbE; iDRAC9.	Validate switch speed / cabling compatibility. Separate management access and record NIC mapping, addresses and approved remote access.
Platform & workloads	Enquiry mentions VMware; no separately priced VMware licence is shown in the supplied product summary.	Confirm licence entitlement, supported version and workload list before installing a hypervisor. Back up source data before any migration.

APPLICATION READINESS

Complete OS / platform configuration, access permissions, backup policy and a restore test using approved tooling. Record customer workload checks and handover credentials through a controlled channel.

Dual CPU supply provides 20 physical cores / 40 threads in total. No cluster, second host, backup product or shared storage is evidenced by this document.

Security integration | Video evidence and controlled entry

CCTV CAPTURE

Camera mounting / view check
Power or PoE verification
Cable and channel identity
Approved addressing

RECORDING & REVIEW

Camera stream -> recorder / VMS
Time and recording schedule
Storage health / retention policy
Authorised live view and playback

CCTV ACCEPTANCE

Check day / low-light image
Recording and sample playback
Operator permissions
Evidence export where approved

DOOR IDENTITY

Enrol approved credentials
Map person / role to door
Check reader / controller power
Confirm attendance scope if needed

CONTROL & SAFE EXIT

Reader -> controller -> lock
Approved door permissions
Exit release and emergency interface
Network / event synchronisation

ACCESS ACCEPTANCE

Authorised / denied entry
Exit release and event timestamp
Power-loss behaviour as designed
Customer security sign-off

Camera counts, door counts, models and storage-retention duration are to follow approved site records. Do not assume CCTV-to-access event correlation is installed.

Implementation | Design, install and prove the system

01 | SURVEY & BASELINE

Map workloads, user points, cameras, doors, rack / power needs and existing services.

02 | DESIGN & APPROVE

Agree topology, port / IP plan, storage layout, permissions and test / rollback procedures.

03 | SUPPLY & INSTALL

Verify models / serials; rack the server; label and terminate cables; mount security devices.

04 | CONFIGURE

Set platform / network interfaces, approved security settings and CCTV / door-system parameters.

05 | TEST & VERIFY

Run network, workload, backup / restore, camera playback and entry / exit acceptance checks.

06 | HAND OVER


Submit configuration copies, inventories, diagrams, test reports and open-action owners.

If migration is included: validate source data and application compatibility, take recoverable backups, schedule cutover and retain a tested rollback path.

Site views & handover | An infrastructure the team can manage



SUPPLIED NETWORK RACK

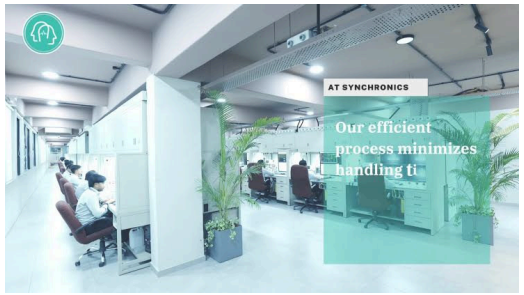

SUPPLIED WORKSPACE VIEW

CUSTOMER & LOCATION

Synchronics Electronics Pvt. Ltd.
4th Floor, Lotus Enora, opposite Rutu Villa
Bungalows, 24 Mt. Main Road,
New Alkapuri, Gotri,
Vadodara 390021, Gujarat.

HANDOVER & SUPPORT

Asset / service-tag register; port and IP mapping; camera / door schedules; configuration copies; approved backup policy; acceptance tests and service contacts. Validate Dell entitlement before OEM escalation.

D-TECH Customer Care | support.dtechindia.com | +91 99989 03042

Sources: supplied server commercial document and four site / brand images; additional infrastructure scope supplied by D-TECH. No measured SLA or uptime results supplied.