

CASE STUDY / DATA-CENTRE RACKS • REVAMPING • IMPLEMENTATION

Three locations. One structured rack environment.

Netafim Irrigation India Pvt. Ltd.

Completed DC, DR and Near-DR work, combining rack infrastructure, cooling provisions, system revamping and installation coordination.



ENCLOSURE + COOLING + SERVICE ACCESS

3**PROJECT LOCATIONS**

DC • DR • Near-DR

COMPLETED**ENGAGEMENT STATUS**

Site work across three locations

RACK + AC**DOCUMENTED PO SCOPE**

Rittal TS8 rack packages

Netafim facility | Data-centre infrastructure delivery

The requirement | An orderly, serviceable IT environment

D-TECH describes the engagement as completed across three locations: the primary data centre (DC), disaster-recovery location (DR) and Near-DR location. The rack-rework requirement brings enclosure, cooling, equipment arrangement and cable organisation into a coordinated implementation scope.


The supplied purchase order formalises the Rittal rack-with-AC supply, installation and revamping package. The design objective is a controlled equipment footprint with lockable access, practical maintenance clearance and clearly organised connections.

Work package	Quantity in supplied PO	Documented scope
Rittal rack-with-AC package	2 packages	TS8 enclosure: 800 W × 2000 H × 1200 D mm; glass front door, rear steel double door and side-panel cooling cutout.
Rack accessories	Within each package	19-inch mounting angles, cable-entry plates, shelves, castors, cable shunting rings and horizontal cable managers.
Installation + revamping	2 lines for each service	Rack installation and existing-system revamping are separately listed in the order.
Transport / handling	2 service lines	Transportation, including loading and unloading at the customer premises.

Scope reference: PO 2900198857, dated 19 December 2015. The PO lists two rack packages and delivery to Plant Baroda, Manjusar / Savli. The third-location inventory and rack-to-site allocation are not itemised in this PO.

Three-location design | DC, DR and Near-DR


The three site roles share a consistent approach to enclosure, cooling provisions and service access. This view explains the infrastructure concept for the client.

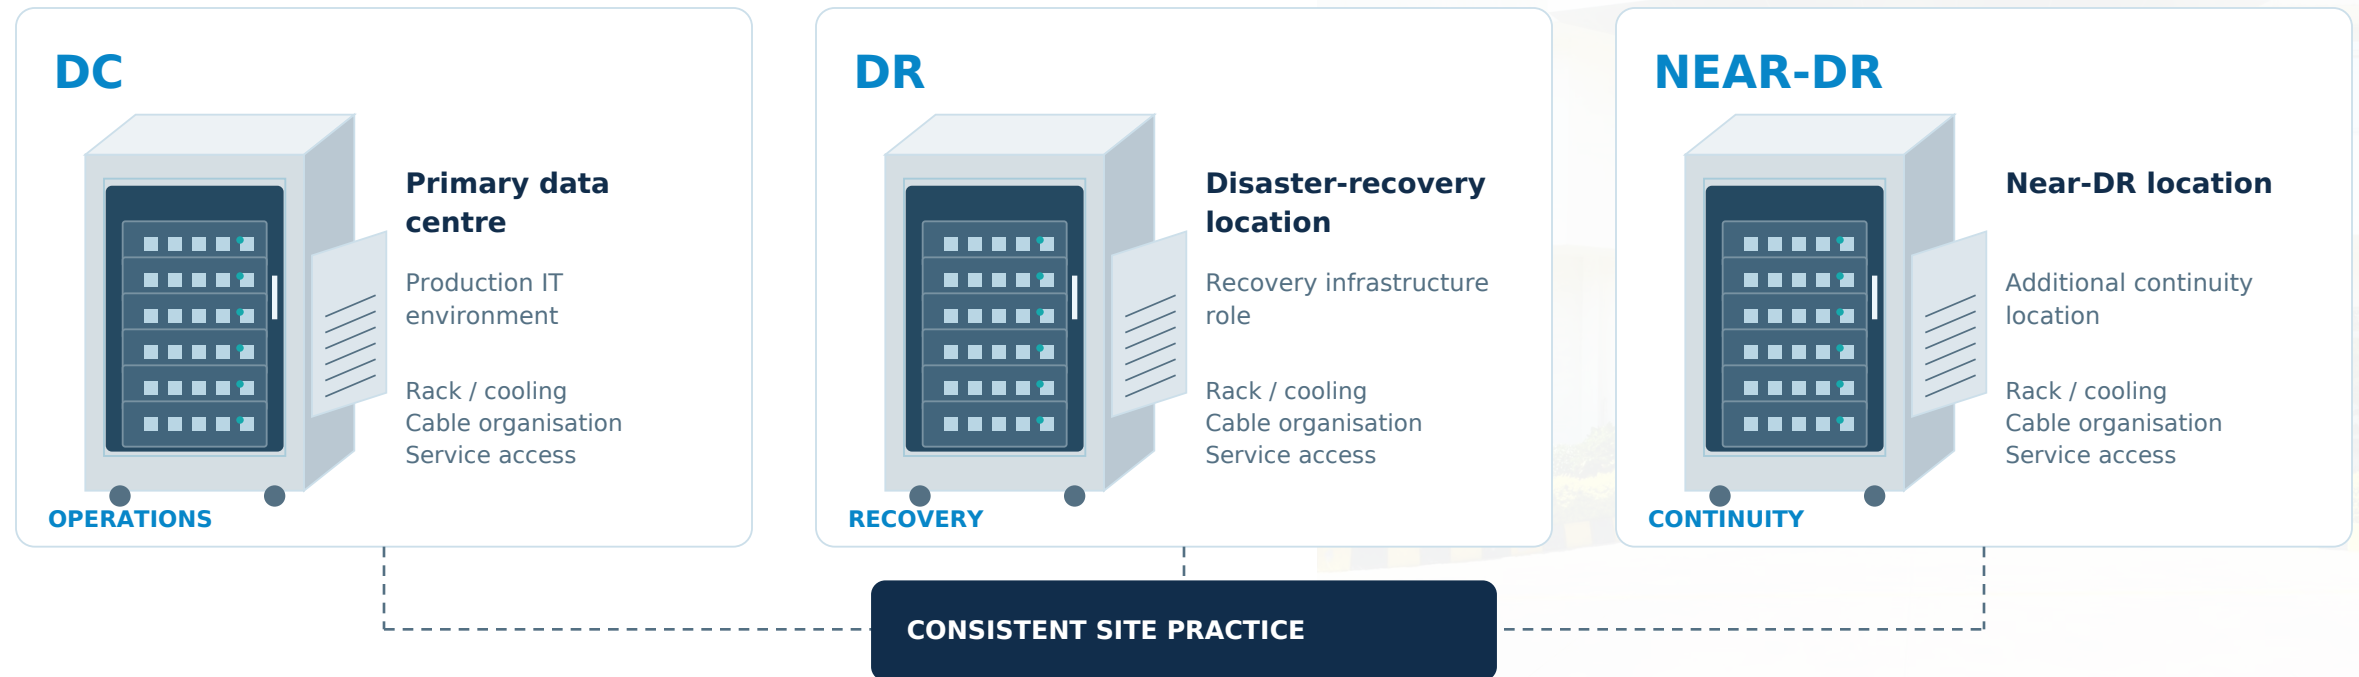

Rack artwork is illustrative. Inter-site networking and data replication are separate from the documented rack-rework package.

Implementation | From rack planning to handover

The delivery process joins physical rack work with controlled reconnection of existing equipment. A clear equipment map and change sequence help the client understand how the environment is arranged, serviced and handed over.

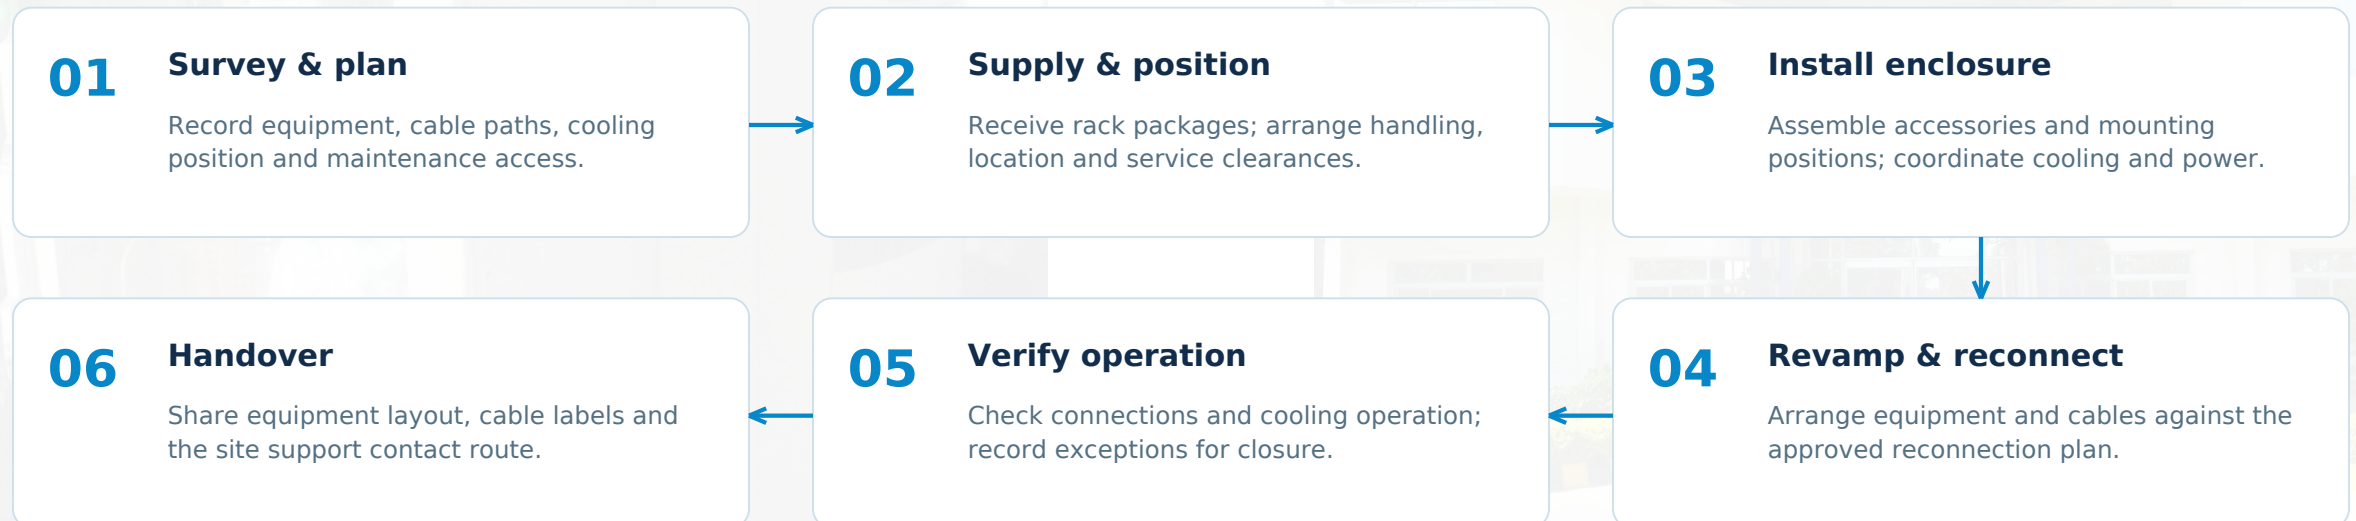

The completed engagement covers DC, DR and Near-DR. The workflow above summarises D-TECH's approach to rack planning, system revamping and handover.

Project photographs | Enclosure, cooling and equipment

Cabinet installation, side-mounted cooling and the existing IT equipment arrangement are shown in the project views below.



01 Rack equipment view



02 Enclosure + side cooling



03 Equipment arrangement



04 Rack equipment detail

Photographs are not labelled by site in the supplied files; no DC / DR / Near-DR assignment is inferred.

Delivered work | Project visuals and client profile



Enclosure + side cooling



Installed rack equipment



Rack equipment detail



NETAFIM IRRIGATION INDIA PVT. LTD.

Project: Data-centre rack rework
Coverage: DC, DR and Near-DR
Status: Completed - D-TECH summary



Supplied Netafim corporate building visual

D-TECH Solution Integrators Pvt. Ltd.

+91 9157420663
AMC@DTECHINDIA.COM

Source notes: Project completion and three-location coverage are supplied by D-TECH. Rack quantities and physical specifications are taken from PO 2900198857 (19 December 2015). The company logos, corporate building visual and rack photographs are supplied assets. Drawings are illustrative design artwork.