CASE STUDY / APRAAVA ENERGY / LONG-TERM SERVICE

Connected surveillance. Continuing support.

Apraava Energy Private Limited

Paguthan Combined Cycle Power Plant

CCTV maintenance, wireless point-to-point connectivity and surveillance network management across a distributed plant environment.

NEARLY 8 YEARS
Continuing contract, support & service

5 KM P2P
Wireless link support & network care

Ongoing engagement and link distance supplied by D-TECH.



The requirement | Reliable visibility across sites

Surveillance in a power-plant environment depends on more than individual cameras. Video must remain accessible across distributed locations, while faults in power, transmission or recording must be traced and resolved through one coordinated support process. D-TECH describes nearly eight years of continuing service for this engagement, including a 5 km wireless P2P link and CCTV network management.

Service area	Requirement and D-TECH contribution
CCTV maintenance	Maintain cameras, video server, media converters, power supplies and related surveillance equipment; restore the full camera-to-recording path.
Distributed coverage	The supplied AMC scope names the plant, township, Nabipur and Angareshwar RWPH. Maintain a location-wise asset and connectivity register.
Wireless connectivity	Support the stated 5 km P2P link: inspect endpoint health, alignment, power, Ethernet links and radio-performance indicators.
Network management	Trace camera reachability, switching and transmission faults; maintain approved configuration copies and controlled changes.


Contract reference: PO 213000045, issued 21 November 2022; documented term 01 November 2022 - 31 October 2023.

That PO substantiates the historical AMC scope. The continuing relationship and 5 km link are D-TECH-supplied engagement details.

ILLUSTRATIVE LOGICAL ARCHITECTURE / EXACT ENDPOINTS TO MATCH SITE REGISTER

Connectivity design | Camera to monitoring desk

The drawing explains the service path. It separates field devices, transmission, recording and authorised viewing so that an incident can be isolated at the correct layer.

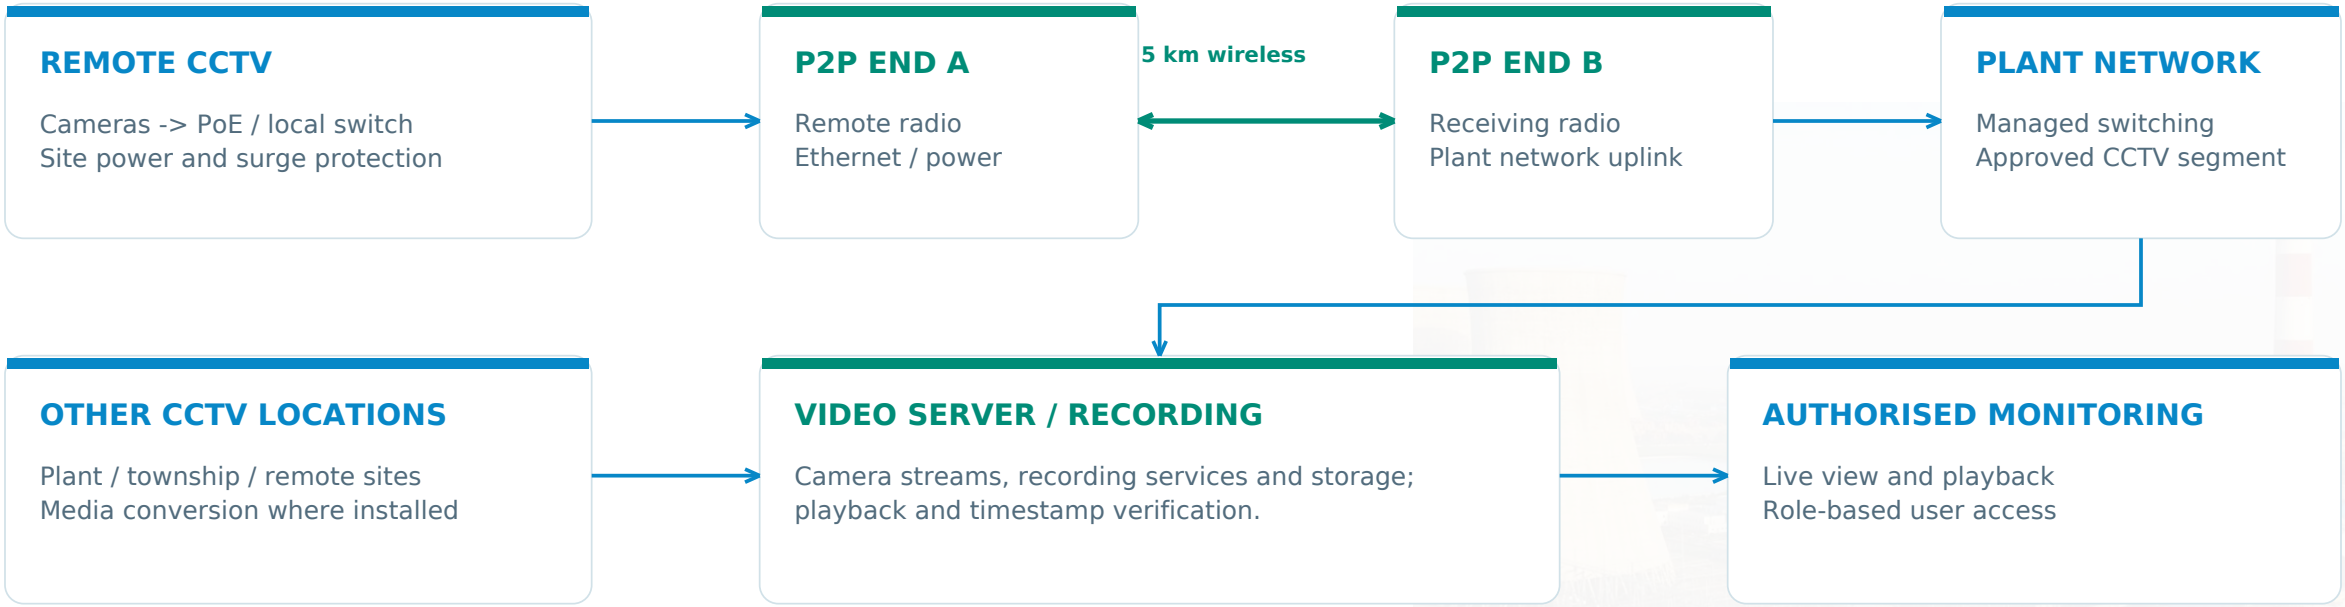

Concept diagram, not an as-built topology. The PO does not identify radio endpoints, brands, VLAN IDs, camera counts or recording-retention settings.

Technical maintenance | Micro-level service controls

Layer	Checks and corrective process	Record / acceptance
Camera & power	Check lens / housing, image, mounting, supply / PoE and connectors. Isolate power or link failure before replacing equipment.	Live image restored; affected channel and corrective action recorded.
5 km P2P link	Check endpoint reachability, radio status, signal indicators, interference, alignment and Ethernet negotiation; compare with commissioning baseline.	Before / after link readings and video-flow test; no invented throughput guarantee.
Network & media	Trace switch ports, cabling, fibre / media converters and uplinks; verify approved addressing and segmentation.	Reachability and stream continuity tested; port / location mapping updated.
Video server & storage	Check services, alerts, recording schedule, time synchronisation, disk health and representative playback.	Recording and playback confirmed; retention follows customer-approved settings.
Access & configuration	Use named authorised accounts; control remote access and configuration changes. Keep recoverable copies under customer policy.	Change record, approved access list and configuration backup status.

PLANT WORK PRACTICES

Coordinate permits, access and safe work with the plant owner. Protect live monitoring during changes, maintain a rollback plan and schedule disruptive work within an approved window.

Technical controls describe the service method; the as-built inventory and actual test records establish installed capability.

Service response | Diagnose, restore and verify

01 | LOG REQUEST

Record site, asset / channel, symptom, business impact and customer contact.

02 | TRIAGE

Identify whether the issue is camera, power, P2P link, network or recording related.

03 | PLAN ACTION

Agree access, prioritise impact and arrange field / specialist assistance.

04 | RESTORE SERVICE

Repair the affected path; apply approved changes and arrange covered parts as applicable.

05 | VERIFY WITH SITE

Check live video, link stability, recording, time and sample playback.

06 | CLOSE & PREVENT

Document cause, action and tests; obtain confirmation and track recurring issues.

Raise a service request | support.dtechindia.com | +91 99989 03042

Continuing service | Ownership, reporting and customer care

CUSTOMER & ENGAGEMENT

Apraava Energy Private Limited
Paguthan Combined Cycle Power Plant
Paguthan, Bharuch, Gujarat 392015
Coverage: plant, township, Nabipur and Angareshwar RWPH.

D-TECH DELIVERY RESPONSIBILITY

CCTV service coordination; network and P2P diagnostics; preventive checks; approved corrective work; escalation; documented verification and customer handover.

Service governance	Operating approach
PM & reporting	Agree visit frequency with the current contract; maintain asset checks, link observations, service reports and an open-action register.
Response & resolution	Set incident priorities, response targets and update intervals with the customer. Log timestamps and restoration tests; the supplied PO states no fixed numeric SLA.

D-TECH Customer Care | support.dtechindia.com | +91 99989 03042

Sources: supplied PO 213000045 and customer logo / plant image; D-TECH narrative: nearly eight years ongoing and 5 km P2P.