Surveillance continuity. Connected infrastructure. Accountable service.

Electrical Research and Development Association

CCTV AMC + LAN Annual Rate Contract

Maintenance, recording checks, network changes and server connectivity interfaces across two ERDA locations.

241 CAMERAS
CCTV AMC REFERENCE

19 RECORDERS
DVR / NVR UNITS


Two locations | Makarpura, Vadodara + Savli



Engagement | Two contracts, one coordinated approach


ERDA’s CCTV AMC and LAN ARC address complementary needs: keeping surveillance devices serviceable and delivering network additions or changes through an agreed rate schedule. D-TECH’s delivery approach links fault diagnosis, site surveys, controlled configuration and acceptance records.

Workstream	Source and period	Confirmed scope
CCTV AMC	PO-2526-00586, 16 July 2025. 01 July 2025 - 30 June 2026.	Non-comprehensive AMC at Makarpura and Savli: 241 cameras, 19 DVR / NVR units; HDD / recording requirements included in the SOW.
LAN ARC	LOI IT/LAN/01/2025-26/01, 10 November 2025. 01 October 2025 - 30 September 2026.	On-call LAN points and cabling; active / passive configuration, site survey, VLANs and L3-switch redundancy requirements.
SERVER INTERFACES	CCTV SOW references remote-server recording if required; LAN design refers to disaster-recovery requirements.	Coordinate recording / server network access. No standalone server hardware supply or server AMC is established by these attachments.
DELIVERY CONTROLS	Customer-approved make / model, installation documentation and wire diagrams.	ARC work completion: 30 days from intimation. Preserve job-level quantities, tests and customer acceptance.

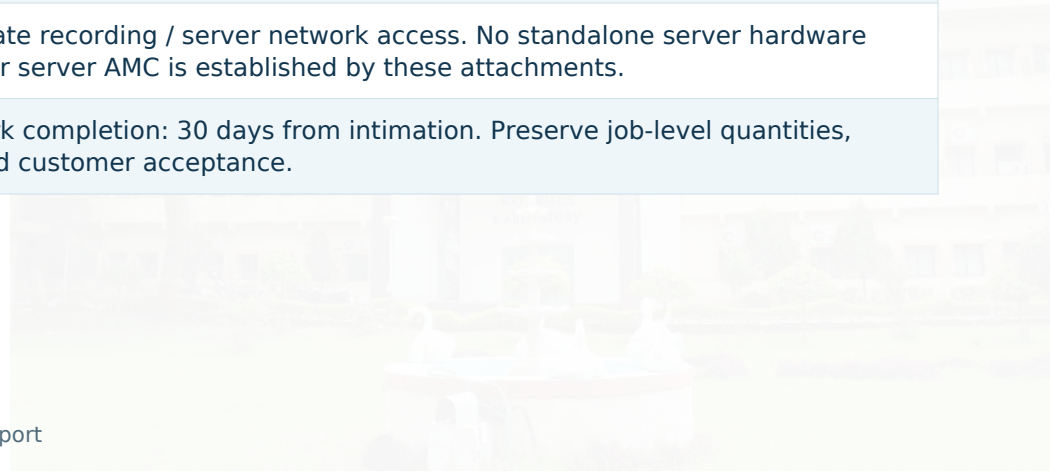

Contents: 03 Solution diagram | 04 CCTV maintenance | 05 LAN / server connectivity | 06 Service process | 07 Customer and support

Solution diagram | Surveillance and network interfaces

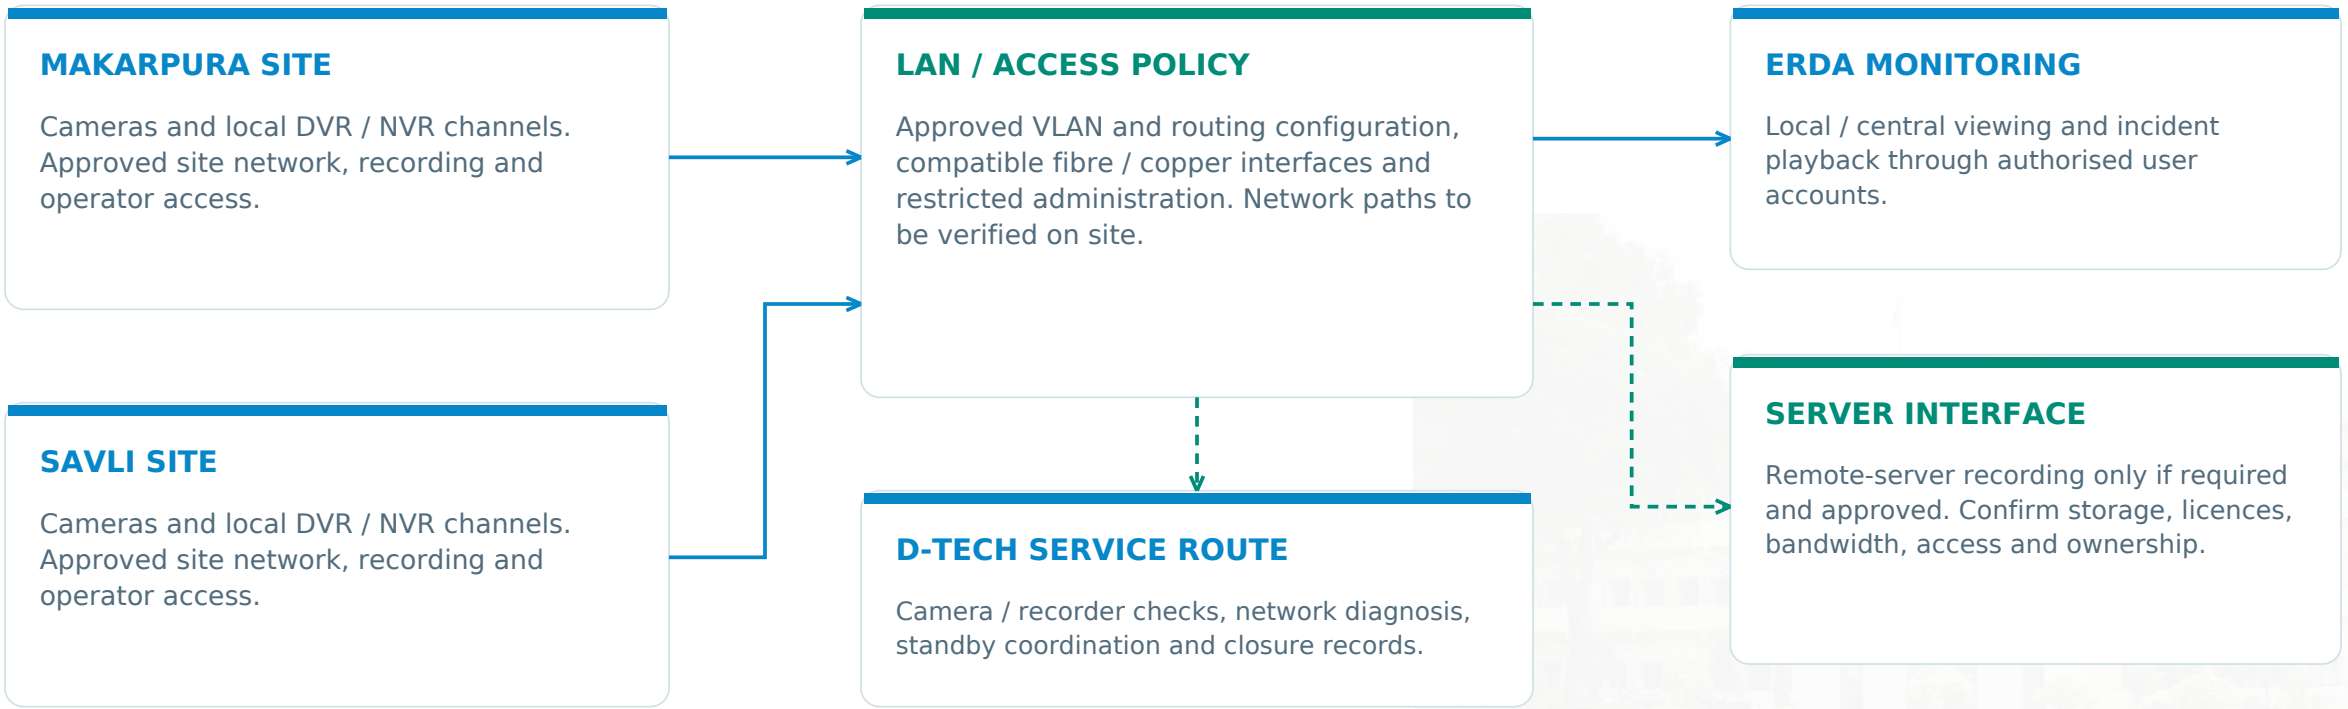

Logical relationships only. Site quantities, cross-site connectivity, VLAN IDs and any remote recording server require approved as-built records.

NON-COMPREHENSIVE COVER / QUARTERLY PM / STORAGE REQUIREMENT

CCTV AMC | Camera health, recording and retention

Control area	Contract requirement / maintenance approach
FAULT SERVICE	Response to a non-working camera within 2 hours; resolution the same day or next business day. Provide backup camera / DVR / NVR / HDD while the faulty unit is out for repair.
PREVENTIVE MAINTENANCE	Quarterly maintenance of all AMC cameras. Check image quality, physical condition, connections, channel availability, time settings and representative playback; record exceptions.
MONITORING / EVIDENCE	Support authorised local and central viewing. Provide requested incident recordings with event / date / time references; control access and preserve export records.
RECORDING / CAPACITY	SOW requires 24x7 continuous recording and 60-day storage. Calculate capacity using actual streams, bitrate, codec and storage overhead; additional disks, if necessary, are to be provided by ERDA.
SOFTWARE FEATURES	SOW describes timestamped recording and video-analytic alarm display; any remote-server recording requirement is subject to approved implementation and platform capability.


RETENTION ENGINEERING

60-day raw video storage (decimal TB) ≈ camera count × average Mbps × 0.648. Use per-recorder allocation and add required overhead / reserve. Retention is a contract requirement, not a verified outcome; confirm recorded bitrate and actual oldest retrievable footage.

Non-comprehensive AMC must follow the signed repair / parts terms. Temporary backup equipment does not imply unlimited permanent replacement supply.

LAN ARC | Structured cabling and server connectivity

Implementation stage	Micro-level work and acceptance record
01 | SURVEY & APPROVE	Inspect routes, rack positions, endpoints, existing switch interfaces and server / recording dependencies. Agree make / model, quantities, VLAN / IP plan and change window.
02 | PASSIVE WORK	Install approved fibre / Cat6A, ducts / trays, LIUs, patch panels, racks, outlets and patch cords. Respect cable routing, protection, labels and customer site requirements.
03 | TERMINATE & TEST	Terminate copper and splice fibre. Record endpoint / core maps, link tests and OTDR results for fibre work as specified; correct faults before active configuration.
04 | ACTIVE CONFIGURATION	Verify optic / switch compatibility; apply ERDA LAN policy, approved VLANs and existing routing. Implement required L3 redundancy only under the approved detailed design.
05 | SERVER / DR INTERFACE	Verify approved server and recording access, bandwidth and failover dependencies. Server build, backup replication, recovery objectives and application ownership need separate scope confirmation.
06 | HANDOVER	Submit active / passive component records, wire diagrams, configuration and test evidence. Complete the call-off job within 30 days from intimation, as specified in the LOI.

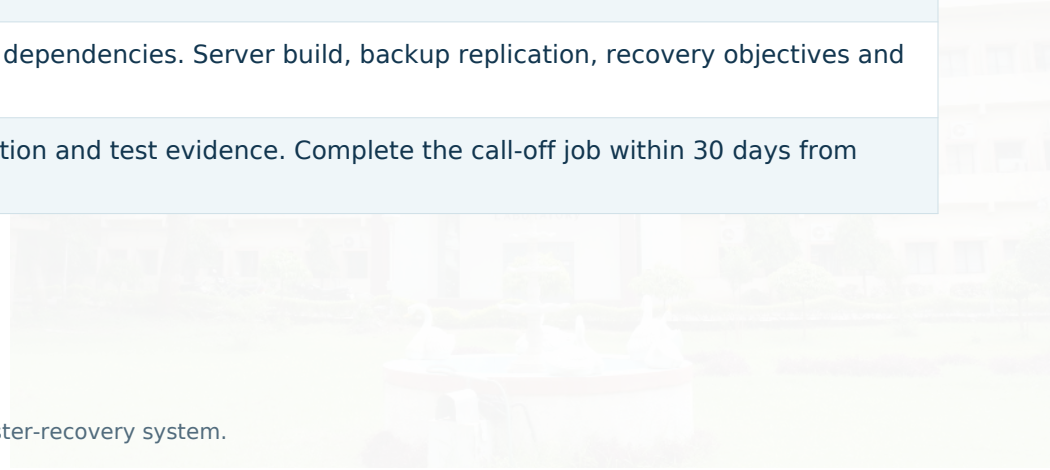

ARC annexure is a rate schedule. Unit entries do not establish the installed totals, an inter-site fibre link or an implemented disaster-recovery system.

Service process | Restore faults and control changes

01 REGISTER
Site, asset, channel and impact.

02 DIAGNOSE
Camera, recorder, power, link and disk.

03 RESTORE
Repair / standby; approved change.

04 VERIFY
Playback / access and customer closure.

Workstream	Operating record	Customer acceptance
CCTV FAULT	Ticket timestamps; affected camera / recorder / HDD; fault findings; standby and repair actions.	Image and channel restored; current recording and playback checked; customer confirms closure.
LAN CALL-OFF	Survey, approved quantities, port / fibre mapping, change plan, tests and updated diagrams.	Required endpoint and server access confirmed; redundancy tested only where implemented; job accepted.
PREVENTIVE REVIEW	Quarterly camera checklist; disk / retention exceptions; repeat-fault trends; authorised configuration copies.	Open risks and corrective actions assigned to owners; maintenance service report approved.

D-TECH support | support.dtechindia.com ↗ | +91 99989 03042

SLA timings describe the CCTV contractual commitment. No measured response performance, uptime or fault-resolution statistics were supplied.

Customer & delivery | Documentation with clear ownership

The combined approach supports surveillance availability and planned network work through one technical coordination route. The customer retains authority over access, scope and acceptance; D-TECH maintains the service and change records needed to diagnose faults and explain completed work.

CUSTOMER & LOCATIONS

Electrical Research and Development Association
Makarpura: ERDA Road, GIDC, Vadodara 390010, Gujarat.
Second covered location: ERDA Savli.
Cover: supplied ERDA building photograph.

HANDOVER & SERVICE PACK

Camera / recorder inventory, site and channel maps, recording-capacity calculation, PM reports, repair / standby register, LAN wire diagrams, configuration backups and job acceptance records.

D-TECH | CUSTOMER SUPPORT

support.dtechindia.com | Raise ticket ↗

+91 99989 03042

Source: CCTV PO-2526-00586 with Annexure I, and LAN ARC LOI IT/LAN/01/2025-26/01 with BOQ / SOW.

This case study presents documented contracted scope and the service methodology. Current renewals, installed configurations and measured results are not asserted.