

11 locations. One monitoring view.

Netafim Irrigation India Pvt. Ltd.

A connected surveillance design combining local recording, central server management and user-wise access to cameras, live views and incident review.

11

LOCATION SCOPE

As requested by D-TECH

1


CENTRAL VIEW

Server-based design

RBAC

USER CONTROL

Role-based permissions

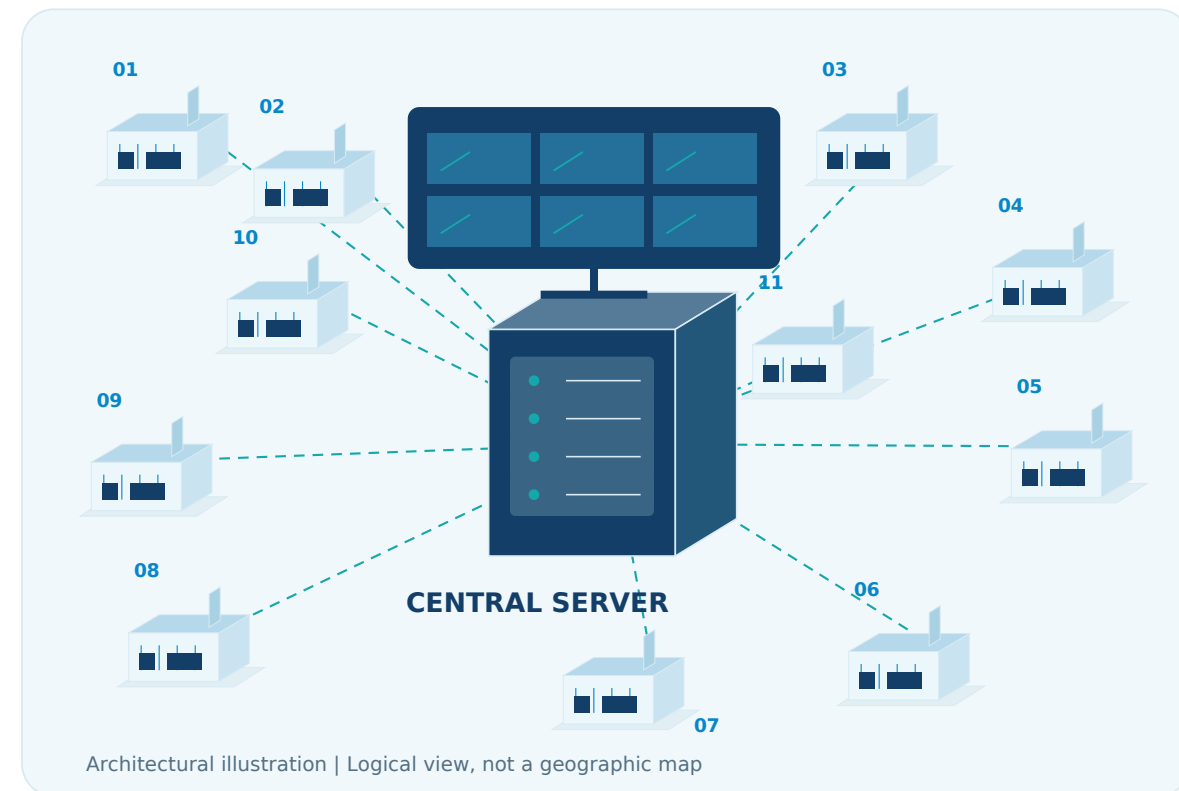

Project record: 2018-2019 site CCTV orders. Central monitoring and server connectivity are shown as a solution design; installed software and completion records were not supplied.

Local recording. Central visibility. Controlled access.

The operating requirement

Netafim requires an 11-location CCTV solution in which each site records its own cameras while an authorised central team can select locations, view video and review incidents through a server-based platform. Access must follow each person's responsibilities: site staff see their assigned area, central security sees approved locations, and system administration remains a separately controlled function.

88

4 MP CAMERAS

Ordered across 11 POs

11

8-PORT PoE NVRs

One per order package

22

4 TB HDDs

Two per order package

11

UPS + RACK SETS

1 kVA UPS + 6U rack each

D-TECH site scope recorded in the orders

Supply of CCTV equipment, Cat 6 cabling, UPS and rack; cable laying with clips, end ferruling and RJ45 termination; camera and bracket mounting; NVR installation and configuration; project management, handling and documentation. The central server, VMS licences and inter-site WAN are additional design elements whose final scope requires confirmation.

The separate plant connectivity sketch shows 48 camera positions. Its overlap with the 88 ordered cameras is unknown, so these quantities are not added together.

11-location connectivity | The central monitoring model

Cameras record locally. Central users request approved live or recorded video over the secured WAN.




Solid blue: system interaction. Dashed teal: proposed WAN links. Central location, server hardware, WAN service and VMS licensing require validation.

* Two purchase orders share the Anantapur shipping address. These are design IDs, not proof of two distinct physical sites.

PLANT DESIGN / REDRAWN FROM THE SUPPLIED CONNECTIVITY SKETCH

Plant A ↔ Plant B | Local camera connectivity

48 camera positions in the supplied plant sketch: Plant A group 28 | Plant B group 20.

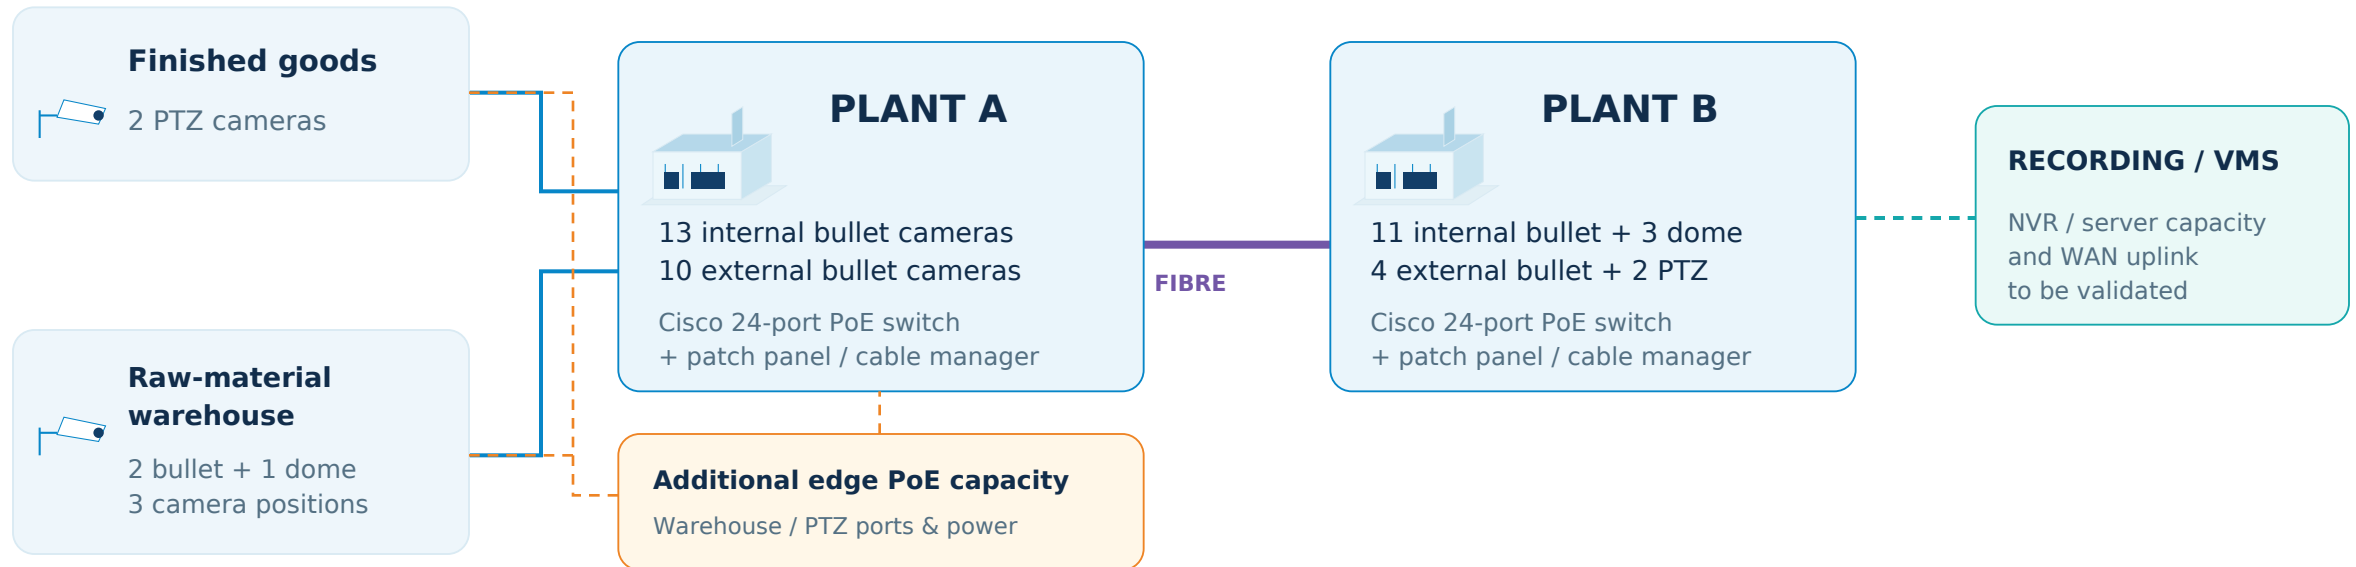


Blue: Cat 6 local links. Purple: A-B fibre link. Orange / teal: design additions requiring confirmation.

Plant A's 28-camera group exceeds 24 camera ports on a single switch. Provide sufficient additional access ports and uplinks; verify PTZ PoE requirements, switch power budgets and recording channel capacity. Building positions are illustrative and not to scale.

Every user sees only the locations they are allowed

Use named accounts, location groups and separate permissions for live view, playback, PTZ control, export and configuration. The following matrix is a proposed policy for client approval; the chosen VMS must support the required functions.

User role	Location / camera scope	Live / playback	Export / PTZ	Administration
Central security operator	Approved cameras across all 11 sites	Live + playback	By approval / assigned PTZ	No system changes
Site security user	Assigned location and camera group	Live + playback as authorised	Restricted / local PTZ if allowed	No user or device changes
Management viewer	Selected sites / dashboards	Live; playback if granted	Normally disabled	No configuration
Incident reviewer	Case-relevant cameras and time range	Playback as authorised	Approved export; log the request	No device changes
IT / VMS administrator	System configuration scope	Video access separately authorised	Restricted to assigned duties	Devices, roles and maintenance

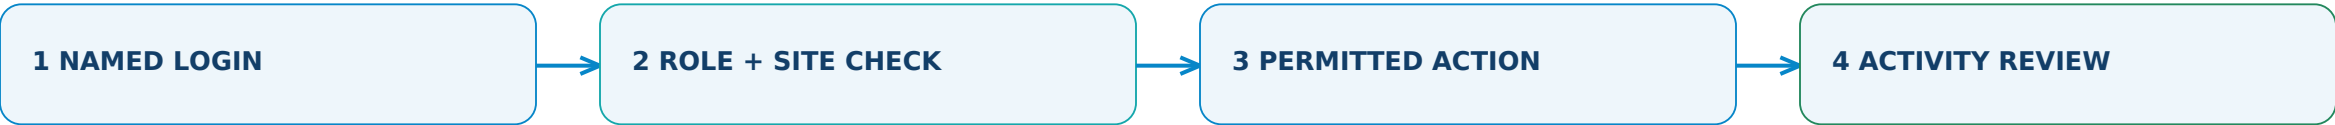

If the user lacks a camera or action permission, deny the request. Review account access when duties change and remove leavers promptly.

Server, network and storage | Define each responsibility

At each location

Local PoE links connect cameras to the NVR. Record main streams on surveillance disks, isolate CCTV traffic in a controlled network segment, and power the rack and recorder through the site UPS.

At the central monitoring centre

The VMS server maintains site and camera groups, user roles and the monitoring workspace. Size it for the selected software and concurrent streams. Central recording or archive storage is a separate scope choice.

Design decision	What must be agreed before final sizing
Recording & retention	Retention days, measured bitrates, recording schedules, usable disk space and overwrite policy. Two 4 TB HDDs per PO are raw capacity; RAID and retention are not specified.
WAN & stream handling	Site upload capacity, concurrent live/playback requests and allowed routes. Use lower-bitrate viewing streams where supported; test under peak demand.
Server & availability	VMS product/version, camera licence count, CPU/RAM/OS, backup of configuration, recovery procedure and any approved redundancy.
Security & evidence	Named accounts, least privilege, approved secure access, synchronised time, export permissions and software-supported audit logs.

Sizing principle: continuous video storage $\approx$ cameras $\times$ average Mbps $\times$ retention days $\times$ 0.0108 TB, before overhead and reserve. Local recording is not itself a second backup copy.

From site survey to a controlled monitoring service



Handover pack: camera / site register, as-built connections, approved access matrix, configuration backup, test results and escalation contacts. Maintenance frequency and SLA follow the agreed support scope.

Client profile | Locations and project record

Design ID	Shipping location in the supplied order	Purchase order
01	Manjusar / Savli, Vadodara · Gujarat	2900293094
02	Jaipur · Rajasthan	2900296275
03	Indore · Madhya Pradesh	2900296296
04	Wadki, Pune · Maharashtra	2900296298
05	Tatibandh, Raipur · Chhattisgarh	2900296299
06	Paldhi / Dharangaon, Jalgaon · Maharashtra	2900296300
07	Pedda Amberpeta / Hayathnagar, Hyderabad · Telangana	2900296301
08	Dasanapura / North Bengaluru · Karnataka	2900296303
09	Anantapur · Andhra Pradesh	2900296304
10	Anantapur · Andhra Pradesh (same shipping address as 09)	2900296305
11	Kalapatti / Veeriyampalayam, Coimbatore · Tamil Nadu	2900296306

Project basis

Client: Netafim Irrigation India Pvt. Ltd. | Site orders: 31 December 2018 and 31 January 2019. Eleven PO packages are provided; IDs 09 and 10 share an address. Validate the 11-location asset register before final deployment. The 48-camera plant sketch is a separate reference, with no confirmed overlap to the PO totals.

Technical reference: Hikvision HikCentral Professional role/resource permission documentation supports the design approach. It does not confirm that HikCentral, a central server or WAN links were procured or installed in this project.

D-TECH | Solution design • Supply • Installation • Configuration • Support

Contact: +91 9157420663 | AMC@DTECHINDIA.COM