CASE STUDY / CCTV MAINTENANCE

Seven years of trust. CCTV care that lasts.

ZCL Chemicals Limited

Ankleshwar | Manufacturing facility
Preventive care, breakdown response and verified surveillance-service restoration.

2019 - 2026 | AMC support continues

Seven-year customer relationship | Continued service
Detailed service method and complaint-to-closure workflow



The relationship | Seven years of CCTV AMC support

ZCL's Ankleshwar facility has maintained a seven-year AMC relationship with D-TECH, with support continuing in 2026 as confirmed by D-TECH. The supplied 2019 CCTV contract provides the documented foundation: planned maintenance, breakdown-call support and signed reports after visits.

2019 | DOCUMENTED FOUNDATION

APRIL 2019 - MARCH 2020

Contract letter dated 1 April 2019

2026 | RELATIONSHIP CONTINUES


SEVEN YEARS OF CUSTOMER ASSOCIATION

Continued AMC confirmed by D-TECH

Relationship foundation	Documented terms and service significance
PLANNED MAINTENANCE	2019-20 contract specifies four preventive visits; its schedule marks April, July and October 2019 and January 2020.
BREAKDOWN SUPPORT	Unlimited breakdown calls are specified for the historical term. Current response hours, parts coverage and commitments require the applicable agreement.
SIGNED SERVICE REPORTS	After every visit, share the service report and recommendations, signed by the customer engineer, with the purchase department.
CUSTOMER CONTINUITY	Seven-year association and AMC continuing in 2026 are D-TECH-provided statements. Individual intervening renewal orders and measured results were not supplied.

Reading guide: 03 Support architecture | 04 Micro-level maintenance | 05 Complaint process | 06 Preventive care, governance and support

Support architecture | Verify the whole surveillance path

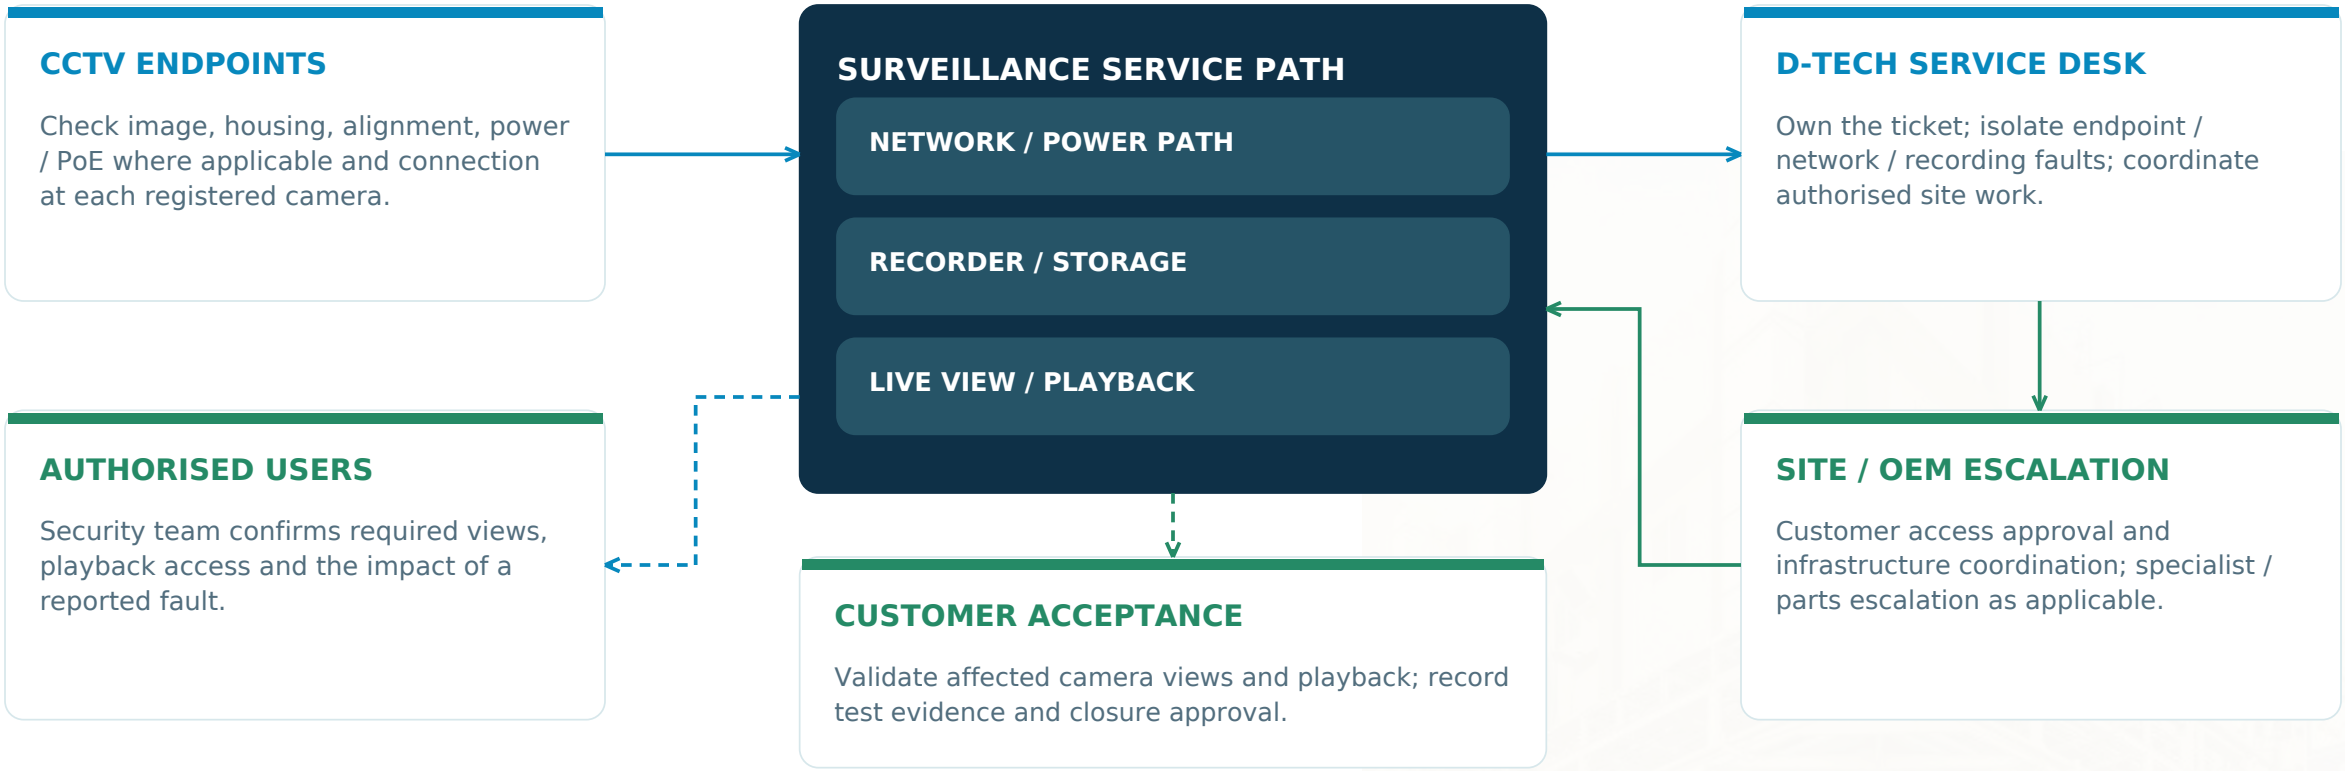

Logical support model only: camera count, NVR / VMS type, VLANs, retention period, switches, power sources and storage capacity require an asset survey.

Micro-level maintenance | Check, isolate and verify

Support area	Detailed diagnostic / maintenance tasks	Evidence and control
CAMERA IMAGE	Inspect accessible lens / housing, focus, scene alignment and live image; check day / night behaviour where applicable.	Camera ID and before / after view; approved cleaning and access procedure.
POWER / CABLING	Check power presence, including PoE where applicable, connector condition, link state and accessible patch leads; isolate the affected segment.	Port / camera mapping; coordinate electrical or switch changes with the owner.
NETWORK PATH	Verify approved addressing, reachability and device connection state; distinguish camera failure from network interruption.	Fault location and test evidence; no unauthorised IP / VLAN / firewall changes.
RECORDING / STORAGE	Check recorder health, channel recording state, disk / volume alerts and gaps at representative incident times.	Recording / playback evidence; avoid formatting drives or deleting footage.
TIME / RETENTION	Check time alignment and configured recording schedules; verify observed earliest available footage against the agreed target.	Time offset, schedule and observed retention. Do not invent storage capacity or retention.
ACCESS / EXPORT	Confirm authorised live view and playback; perform a permitted export test using non-sensitive footage where practical.	User-role approval and export result; restricted footage and credentials stay protected.
REPAIR / RESTORE	Resolve approved settings / connection faults; coordinate covered repairs or separately approved parts; retest affected channels.	Action / parts log, test result and customer acceptance. Replacement coverage requires agreement.

Maintenance tasks describe the operating method; actual incident results, camera inventory and measured availability were not supplied.

Complaint-to-closure | Accountable service at every step

01 | REGISTER

Log camera / area, fault time, live-view or recording symptom and business impact.

02 | ASSESS

Isolate endpoint, power, network or recorder issue; agree priority and safe access needs.

03 | PLAN & AUTHORISE

Confirm site induction, access permit, maintenance window and any parts / change approval.

04 | RESTORE

Execute authorised maintenance / repair; coordinate customer or OEM dependencies and updates.

05 | VALIDATE

Confirm image, recording and playback for affected channels; security owner verifies requirements.

06 | CLOSE & REVIEW

Record cause if known, action, parts, timestamps, evidence and customer confirmation.

Raise a service request | support.dtechindia.com | +91 99989 03042

Long-term care | Familiarity, records and accountable service

Service discipline	Service method and customer value
PLANNED PREVENTIVE CARE	Use an agreed visit calendar to review camera condition, image quality and recording health. The supplied 2019-20 contract specifies four visits; confirm current frequency separately.
BREAKDOWN OWNERSHIP	Maintain a clear complaint register and customer contact route. Unlimited breakdown calls are a historical commitment; current SLA and replacement scope are agreement-specific.
SIGNED REPORTS	Preserve the original reporting discipline: documented actions, findings and recommendations, signed by the customer engineer and shared with the purchase department.
CUSTOMER FAMILIARITY	A long association can support continuity of site knowledge, camera mapping and service history when registers and handovers are maintained. These benefits are service objectives, not measured outcomes.
LIFECYCLE REVIEW	Review repeat faults, ageing equipment, coverage changes and recorder capacity with the customer. Obtain approval for upgrades, replacements or disruptive changes.

CUSTOMER / LOCATION

ZCL Chemicals Limited | Manufacturing facility
Plot 3102/B, GIDC, Ankleshwar,
Gujarat 393002.

D-TECH | CUSTOMER CARE

support.dtechindia.com | Open support portal

+91 99989 03042

Basis: supplied 2019 CCTV AMC letter, client visuals and D-TECH confirmation of seven years / continued AMC in 2026. No numerical SLA or uptime outcome is claimed.

The letter contains unrelated weighing-balance wording; its subject, item table and maintenance schedule identify CCTV. Current terms require the current agreement.